

Advances Image-Based Automated Security System

Sunil Kumar, ASET, India

 <https://orcid.org/0000-0002-8348-1553>

Rashmi Mishra, KEC, India

Tanvi Jain, ABES EC, India

Achyut Shankar, Amity University, Noida, India*

ABSTRACT

As security is a serious concern nowadays, it becomes important to develop a product that deals with security issues without any human intervention. Hence, an automatic security system is a proposed device that ensures the security of the premises. Using both emerging technologies and specialized hardware, we can achieve safety goals and be able to develop the proposed device. It is an IoT-based approach that includes cloud computing, OpenCV, and web application for developing a security-based automatic system. Using raspberry pi and software, the authors design an automated security system where all the used electrical items are controlled. This system deals with the protection of possessions, minimizing break-ins, and avoiding any dangerous situations. The additional salient feature is that it also deals with the COVID-19 alerts, which are generated from the temperature sensor. Therefore, it protects the premises not only from any unauthorized access but also protects the premises from any infected person.

KEYWORDS

Cloud Computing, IoT, KNN, OpenCV, Raspberry Pi, Temperature Sensor

1. INTRODUCTION

As security is crucial nowadays, every organization needs a path to keep unwanted or unauthorized person outside the premises to make their organization fully secured. It is feasible to develop a secure system that can be accessed remotely by humans. The efficient way of dealing with security is by using low powered embedded devices and software because the efficiency of the system should be increased and the energy consumption for the entire process should be decreased.

IoT is a powerful technology with which every single thing can connect with the internet and can perform the dedicated task assigned by the human without any human involvement. IoT devices like Raspberry Pi (Patil et al., 2017), pi camera, sensors such as motion sensor and temperature sensor are low powered and hence consumes less energy and perform the desired task. Moreover, combining this

DOI: 10.4018/IJDST.339685

*Corresponding Author

This article published as an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>) which permits unrestricted use, distribution, and production in any medium, provided the author of the original work and original publication source are properly credited.

technology with OpenCV (Akbas & Ahuja, 2020) results in the production of the two-dimensional output from the three-dimensional article. This helps us to determine the vehicle's and the person's identity. Identification of this information generates the data from the devices.

Now it becomes difficult to handle the large amount of data that is generated from IoT devices through sensors or pi camera from an external environment. In order to store the entire data and analyze the data, cloud computing comes into the role. Cloud computing is the delivery of the resources required by the user and provides the space to store a large amount of data. Hence, combining IoT, OpenCV and cloud computing provides the path to ensure the desired task to get completed.

The main aim of this research is to prevent the presence of any unauthorized person within the premises. The primary objective is to reduce human work and accomplish the task of security automatically (Penmatsa & Ganta, 2020). As automation becomes the prime factor for the security, this paper aimed to design and implement an automatic security system with the help of low powered devices and the system that provides overall control to the owner remotely.

Moreover, this research also deals with the problem of the pandemic situation by deploying the temperature sensor that automatically allows only those people into the premises whose body temperature is normal. Hence, it is an efficient security system (Indumathi & Gitanjali, 2020) that ensures security, provides convenience to the user, being energy efficient and provide remote connectivity. When the device automatically alerts the status of what is going on at your place ensures security. Moreover, the devices interact with each other and decide without any human involvement. All the activity gets automatically completed that provides convenience to the user.

2. RELATED WORK

Some of the methods are discovered over the last couple of years on the image processing technique using OpenCV for object detection. There are several ways for extraction and identification of the number from the number plate. Moreover, there are also several algorithms designed in order to recognize the face. Additionally, IoT draws attention to the security of possession remotely. So, we can see (Table 1) the different ways that are carried out in previous years (Reddy, Marla, Favorskaya, Satapathy, Singh, Bansal, Kamal, & Kumar, 2022).

In the last four years, there has been a drastic change in the development of smart and intelligent security system. Over the year, various systems are developed which enhances their previous shortcomings. But some of the challenges persist which needs to be eradicated. These challenges include accuracy, proper orientation, high resolution and limitations of hardware components used (Reddy, Marla, Favorskaya, Satapathy, Singh, Bansal, Kamal, & Kumar, 2022).

As the main aim of any algorithm is to ensure accuracy, consistency, efficiency and reliability. Hence it becomes more important to cover all the possible cases and deals with them in such a way that the algorithm provides the best result along with accuracy, efficiency, and consistency. In the case of image processing techniques, there are so many such cases that are not deal which reduces the accuracy rate. Such cases are orientation, resolution, and any hardware challenge. So these all cases need to consider which brings out accuracy and consistency (Sharma et al., 2020; Singh, Bansal, & Kumar, 2020).

3. PROPOSED METHOD

There are several modules in our proposed system that combines to ensure the security of the premises. In this system, we use microcontroller i.e., raspberry pi in order to control the function of all modules and provide the required output according to the way it is programmed. Here, raspberry pi connects to the face detection and recognition module and number plate detection and recognition module. The pi camera is the main component which is responsible for taking all the inputs in form of images iff there is any motion detected from the motion sensor (Fig. 1). From the image, it is determined

Table 1. Literature survey

S.No.	Author Name	Published On	Topic	Advantage	Disadvantage
1.	Paul Viola, Michael Jones	2001	Rapid Object Detection using a Boosted Cascade of Simple Features	Three features are integral image, learning algorithm, combining more complex classifier.	It only deals with high quality images.
2.	Kaushik Deb, Ibrahim Kahn, Anik Saha, Kang-Hyun Jo	2012	An efficient method of Vehicle License Plate Recognition Based on Sliding Concentric Windows and Artificial Neural Network	Extract license plate (LP) from natural properties by finding vertical and horizontal edges.	It works under fixed orientation.
3.	Pierre Sermanet, David Eigen, Xiang Zhang	2013	Integrated Recognition, Localization and Detection using Convolutional Networks	Multiscale and sliding window approach.	It does not consider any blurring techniques.
4.	Faizan Ahmad, Aaima Najam, Zeeshan Ahmed	2013	Image-based Face Detection and Recognition: "State of the Art"	Various face detection and recognition methods based on subjects, pose, emotions, race and light.	Accuracy and speed of identification is a main issue.
5.	Joseph Redmon, Santosh Divvala, Ross Girshick	2015	You Only Look Once: Unified, Real-Time Object Detection	It can be optimized end-to-end directly on detection performance.	It does not provide accurate result in real time.
6.	Divya Meena, Ravi Sharan	2016	An approach to face detection and recognition	Fast detection and high accuracy.	High computation time if resolution is high or high dimensional data is used.
7.	Neha Patil, Shrikant Ambatkar, Sandeep Kakde	2017	IoT based smart surveillance security system using raspberry Pi	Stop burdening of the server by recording an image only when needed.	Not available for wireless relay connection.
8.	Xingyi Zhou, Dequan Wang, Philipp Krahenbuhl	2019	Objects as Points	Sophisticated multi-stage methods and runs in real-time.	It does not deal with noisy and low illuminated plate.
9.	Ravi Kiran Varma P, Srikanth Ganta, Hari Krishna B	2020	A Novel Method for Indian Vehicle Registration Number Plate Detection and Recognition using Image Processing Techniques, Procedia Computer Science	It deals with, noisy, low illuminated, cross angled, non- standard font number plates.	It only deals with one type of blur i.e, Gaussian.
10.	J. Indumathi, N. Asha, J. Gitanjali	2020	Smart Security System Using IoT and Mobile Assistance	Lightweight, low cost, extensible, flexible wireless IoT-based-smart security system.	Intruder detection time and its accuracy is a concern.

that the person is authorized or not. If the person or vehicle is authorized then they are automatically allowed and the door gets opened. But if the person is not authorized, then a notification is passed to the owner giving them information about the person or the vehicle present in the premises (Kumar et al., 2021; Kumar et al., 2017a; Kumar, Ranjan, Singh, & Tripathy, 2020). If the owner allowed the

person or vehicle then the door gets opened otherwise the doors remains closed. Hence, this provides the basic outline of the proposed system in which three major modules are number plate detection and identification, face detection and recognition and the website that provides the notification (Indumathi & Gitanjali, 2020).

3.1 Number Plate Detection and Identification Module

This is the first module of the proposed system in which the number plate of a vehicle is detected and matched over the database. In this module, (Fig. 2) the image clicked from the Pi camera is taken and after that the image is converted into GRAY scale. After conversion, if the image of the vehicle is not clear or not properly oriented then blurring techniques are applied in order to extract the number plate (Sermanet et al., 2013). Some of the blurring techniques are Blur, Gaussian blur, Bilateral Filter blur, Median blur etc. After that, the canny edge of the image is determined. Canny edge is a method that provides basic and useful information from the image. In order to find the number plate, we have to extract all those edges that form a closed rectangular contour. It provides the region of interest of the image i.e., number plate from the image. The selected ROI (region of interest) is passed to the pytesseract that extracts the text from the region of interest (Deb et al., 2012).

3.2 Face Detection and Recognition

This is the second module of the proposed system in which the face of the person is detected and then recognized (Fig. 3). In this module, the haarcascade library is used that determines the region of interest i.e., the face from the image (Viola & Jones, 2001). This implies the detection of the face from the captured image. The image clicked from the Pi camera is taken, after which the image is matched from the data set of the images. The data set contains a hundred images of the individual. That means the model is trained with a data set that contains a huge number of images. Recognition

Figure 1. Automated security system


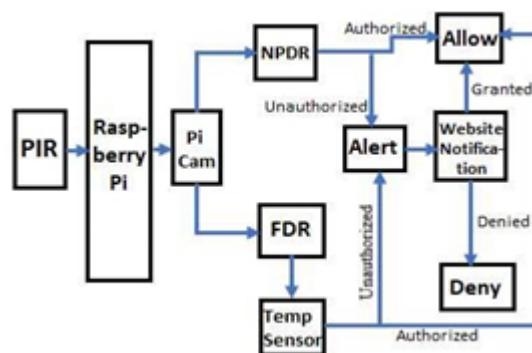


Figure 2. Number plate detection and identification

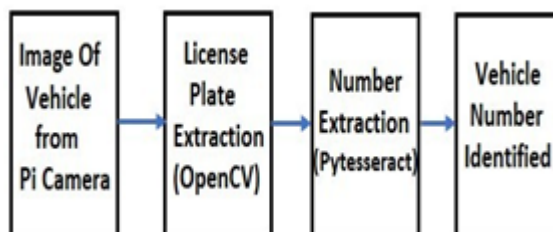

of the face depends upon the accuracy of the image matched with the data set, if the image crosses the threshold percentage, then the person is an authorized person (Meena & Sharan, 2016). The face is identified only and only if the result obtained is greater than the threshold value (Kumar, 2020; Kumar et al., 2015c; Singh, Bansal, & Kumar, 2020).

3.3 Website Notification

In this module, every information is notified to the owner about the unauthorized vehicle or unauthorized person present within the premises (Fig. 4). This website is developed using Django framework that takes input only if the person is unauthorized from the above two modules (number plate detection and identification and face detection and recognition). If the person is unauthorized and known to the owner then the owner allows the person remotely to enter the premises. But if the person is unauthorized and is not recognized by the owner then it is clear that the person is intruder hence the owner denies the person to enter the premises and takes required actions. In our website, there are specific buttons to allow or deny access (Dubey et al., 2020; Kumar et al., 2017b).

4. FLOW DIAGRAMS

The flow chart (Fig. 5) represents the working of our first algorithm i.e., Number Plate Detection and Identification. The algorithm is designed (Akbas & Ahuja, 2020) in such a way that the image is being captured, converted into gray-scale and then canny edge is determined to obtain all contours.

Figure 3. Face detection and recognition


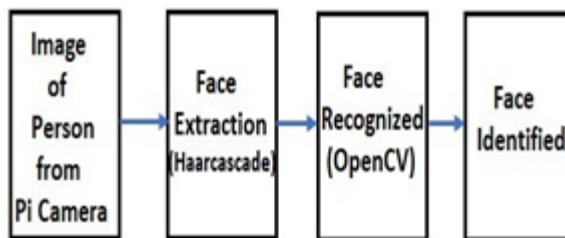


Figure 4. Django website

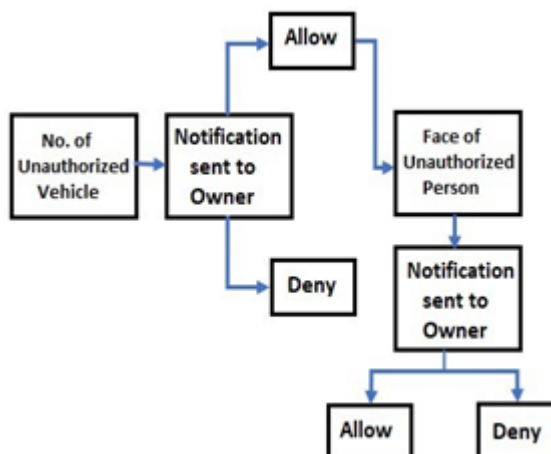

After that, contours having length four is being determined which is our required number plate which needs to be passed through pytesseract for the extraction of the numbers. These steps are performed one by one achieving our final result i.e. car's number in text format (Punhani et al., 2019).

This flow chart gives a complete view of the importance of blurring techniques. There are so many possibilities that the orientation of the car is not fixed or the image captures is not having good quality (Kumar et al., 2016; Reghu & Kumar, 2019). So, this algorithm handles such cases also. In these two scenarios blurring techniques are applied until the number is extracted from the license plate. Hence it increases the accuracy rate of having the correct output.

The flow chart (Fig. 6) represents the working of our second algorithm i.e., Face Detection and Recognition. This algorithm is designed in such a way that the image of the face of a person is being captured using a Pi camera which is processed through Haarcascade Library. The face is detected using the Face_Extractor method that helps us to identify the region of interest. After this collecting all the samples into the folder so that they can be trained further. The entire model then trained using LBPHF and using model.predict determines the confidence of the image (Kumar et al., 2015a, 2015b; Kumar, Ranjan, Singh, & Tripathy, 2020). If the confidence of the image is having a value larger than the threshold value then the person is authorized otherwise not. This provides precision in the obtained result of face recognition and helps to achieve efficiency in the proposed system.

5. RESULTS AND OBSERVATIONS

The real implementation of the proposed system is shown in (Fig 7). The results obtained from each and every module of the proposed system are discussed in detail which are as follows:

Figure 5. Process of vehicle's number identification


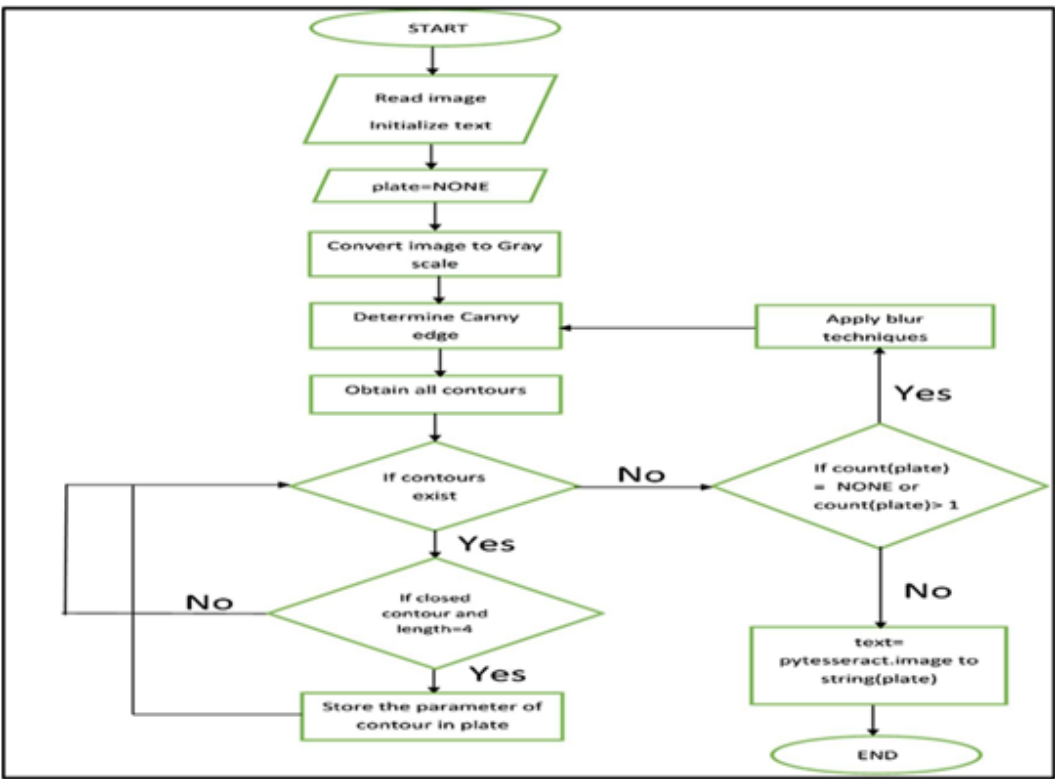


Figure 6. Process of face recognition

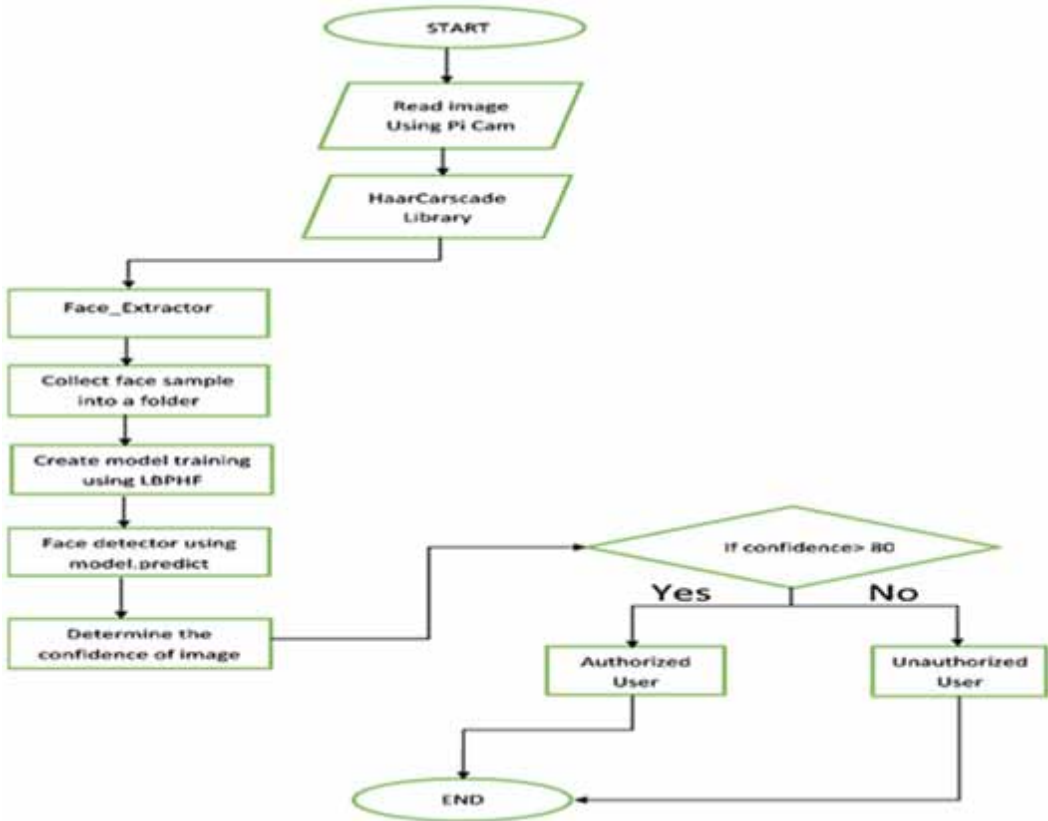

5.1 Number Plate Detection and Identification

We have performed our algorithm on following number of datasets and hence determined the following observation (Table 2). Here True Positive represents that the image of car is given and the correct number is determined, True Negative represents that the image of car is not given and no number is determined, False positive represents that the image of car is present but number is not determined and false negative represents that the image of car is not given but number is determined (Kumar et al., n.d.; Sudhakaran et al., 2020).

When the dataset is 50 the accuracy rate of detecting the correct number from the number plate is 90%, for 100 datasets the accuracy rate is 92% when taking 200 datasets the accuracy rate reaches 89.5% and for 500 datasets the accuracy rate is determined is 91.2%. Hence the overall accuracy rate of the different datasets is 90%. From the table, it is clear that when taking 100 datasets it provides a better accuracy rate for our proposed system. The overall accuracy gained from our proposed system is 90% when taking different datasets.

Plotting the graph (Fig. 9) according to the result based on the level of accuracy. Taking X-axis with the dataset for number plate detection and identification and Y-axis with the rate of accuracy. From the graph, it is clear that the accuracy at 100 datasets is the highest. This means while traversing our algorithm on 100 datasets we get the best result i.e. the maximum number of the vehicle is correctly identified in this dataset. While taking 200 datasets provides the least accuracy rate.

Figure 7. Result obtained

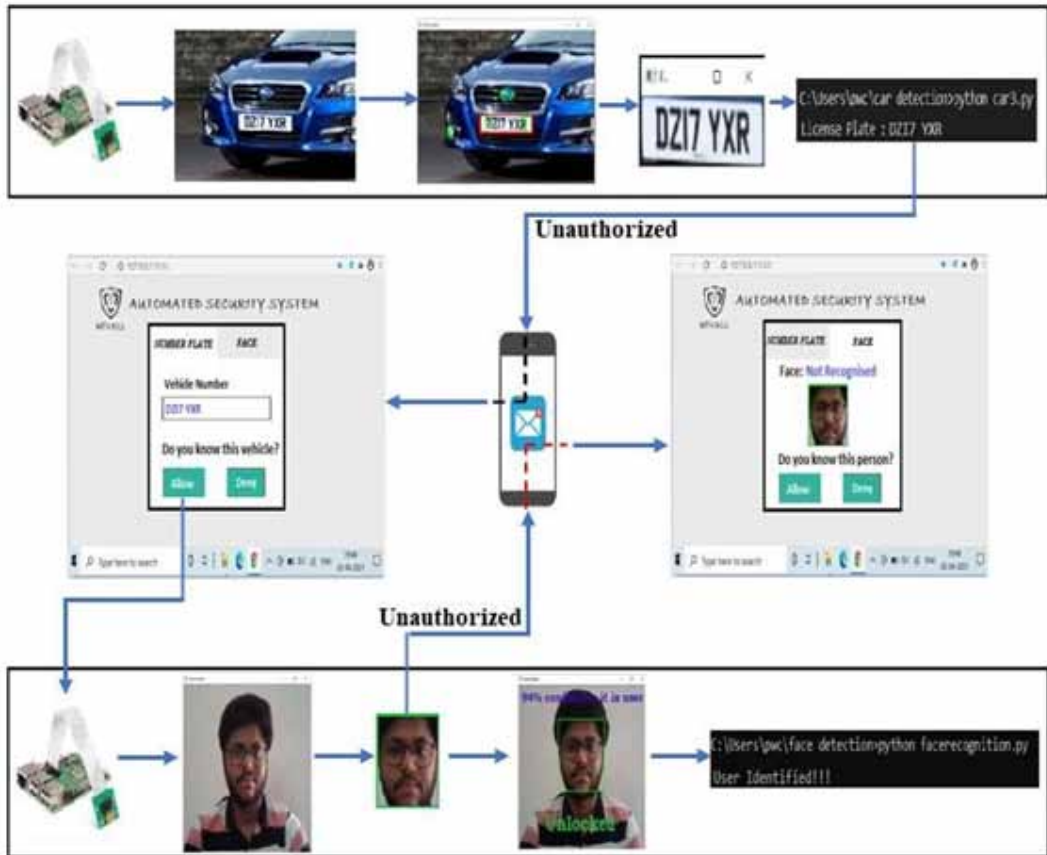


Table 2. Result based on accuracy

S.No.	Dataset	True Positive	True Negative	False Positive	False Negative	Accuracy
1.	50	43	2	3	2	90%
2.	100	90	2	5	3	92%
3.	200	173	6	14	7	89.5%
4.	500	437	19	28	16	91.2%
Overall Accuracy						90.675%

5.2 Face Detection and Recognition

We have performed our face detection algorithm on 243 images and compared those with another existing algorithm as shown in (Table 3). From the below observation it can be concluded that the accuracy of our proposed method is better than the existing algorithms. Here true positive means that the face is detected from the captured image and the face is correctly recognized. False positive means that the image is detected but not recognized and false negative means that the image is not present but it recognized.

Figure 8. Experimental results on different dataset

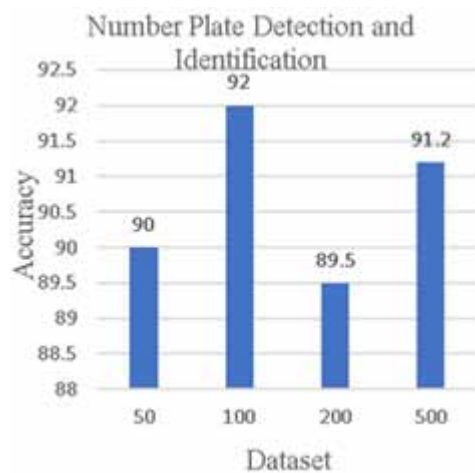


Figure 9. Experimental results on different method

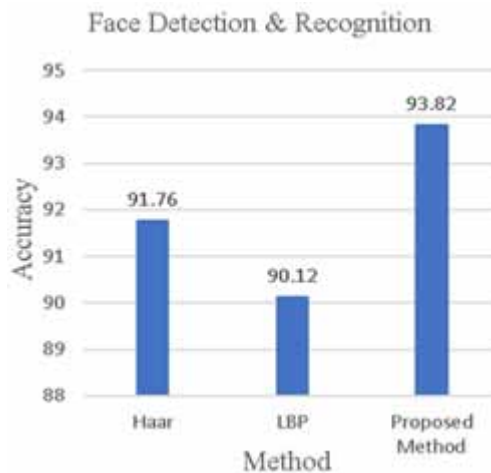


Table 3. Result based on comparison

Total Faces			243	
Methods	True Positive	False Positive	False Negative	Accuracy
Haar	223	13	7	91.76%
LBP	219	18	6	90.12%
Proposed Method	228	9	4	93.82%

The existing method like Haar provides an accuracy rate of 91.76% for correct face detection and recognition. While LBP method provides 90.12% accuracy rate only which is less than the accuracy rate of Haar. But our proposed method provides an accuracy rate of 93.28% which is higher than the accuracy rate of the other two existing methods.

Plotting the graph (Fig. 9) according to the result based on the comparison. Taking X-axis with the different types of methods for face detection and recognition and Y axis with the rate of accuracy. From the graph, it is clear that the accuracy of the proposed method is greater than the accuracy of the existing system.

This means that the proposed system can obtain the result for all such cases which is not been able to deal with in the other two methods. Hence the overall accuracy rate of the proposed system is 93.82 which is higher than the other two methods such as Haar method and the LBP method. Hence able to achieve precision and accuracy rate for our proposed method.

6. NOVELTY IN THE PAPER

“The main feature of our proposed system is identifying the authorized number plate of an unauthorized person present within the premises”. Though determining the unauthorized person and unauthorized vehicle is done separately but they are connected via a database. In order to identify such a case where the vehicle is authorized but the person inside that vehicle is unauthorized is the main novelty of the paper.

7. FUTURE WORK

As we know that technology is a phenomenon which keeps on updating day by day and regarding object detection there are lot of techniques for detection, classification, recognition, etc. So, in the social security department, technologies like Artificial Intelligence, Deep Learning, Robotics, Neural Network and Machine Learning are widely used in many situations.

In the upcoming generation, many countries will have an automated system for their various license plate monitoring as well as traffic rules problems. The algorithm should be optimized to give higher results and an authority centric delivery system should be built to automate the social security and traffic rules problems.

8. CONCLUSION

This paper concludes the successful execution of the proposed device that deals with the security issues without any human interference. In case of presence of any unauthorized person or unauthorized vehicle, the system notifies the owner through the website so that user can handle the situation remotely.

Conflict of Interest: There is no conflict of interest. For any further information and data, you may contact at sk4sunilkumar@gmail.com.

REFERENCES

- Akbas, E., & Ahuja, N. (2020). Low-level multiscale image segmentation and a benchmark for its evaluation. *Computer Vision and Image Understanding*, 199.
- Deb, K., Khan, I., Saha, A., & Jo, K.-H. (2012). An Efficient Method of Vehicle License Plate Recognition Based on Sliding Concentric Windows and Artificial Neural Network. *Procedia Technology*, 4, 812–819. doi:10.1016/j.protcy.2012.05.133
- Dubey, G., Kumar, S., & Navaney, P. (2020). Extended Opinion Lexicon and ML based Sentiment Analysis of tweets: A novel Approach towards Accurate Classifier. *International Journal of Computational Vision and Robotics*, 10(6), 505–521.
- Indumathi, J. N. A., & Gitanjali J. M. (2020). Smart Security System Using IoT and Mobile Assistance. *Emerging Research in Data Engineering Systems and Computer Communications Advances in Intelligent Systems and Computing*, 441–453. .10.1007/978-981-15-0135-7_41
- Kumar. (2020). *Evolution of Software-Defined Networking Foundations for IoT and 5G Mobile Networks*. IGI Publisher.
- Kumar, S., Cengiz, K., & Vimal, S. (2021). Energy Efficient Resource Migration Based Load Balance Mechanism for High Traffic Applications IoT. *Wireless Personal Communications*. Advance online publication. doi:10.1007/s11277-021-08269-7
- Kumar, S., Ranjan, P., & Ramaswami, R. (n.d.). Energy optimization in distributed localized wireless sensor networks. *Proceedings of the International Conference on Issues and Challenges Intelligent Computing Technique (ICICT)*. DOI: 10.1109/ICICT.2044.67813
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2015a). A Utility Maximization Approach to MAC Layer Channel Access and Forwarding. *Progress in Electromagnetics Research Symposium*, 2363-2367.
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2015b). EMEEDP: Enhanced multi-hop energy efficient distributed protocol for heterogeneous wireless sensor network. *Proceedings - 2015 5th International Conference on Communication Systems and Network Technologies, CSNT 2015*, 194-200.
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2015c). Energy aware distributed protocol for heterogeneous wireless sensor networks. *International Journal of Control and Automation*, 8(10), 421-430. doi:10.1109/Confluence47617.2020.9057829
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2016). An NS3 Implementation of physical layer based on 802.11 for utility maximization of WSN. *Proceedings - 2015 International Conference on Computational Intelligence and Communication Networks, CICON 2015*, 79-84.
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2017a). Energy Efficient Multichannel MAC Protocol for High Traffic Applications in Heterogeneous Wireless Sensor Networks. *Recent Patents on Electrical & Electronic Engineering*, 10(3), 223–232.
- Kumar, S., Ranjan, P., Ramaswami, R., & Tripathy, M. R. (2017b). Resource efficient clustering and next hop knowledge based routing in multiple heterogeneous wireless sensor networks. *International Journal of Grid and High Performance Computing*, 9(2), 1–20. doi:10.4018/IJGHP.2017040101
- Kumar, S., Ranjan, P., Singh, P., & Tripathy, M. R. (2020). Design and Implementation of Fault Tolerance Technique for Internet of Things (IoT). *Proceedings - 2020 12th International Conference on Computational Intelligence and Communication Networks, CICON 2020*, 154–159. doi:10.1109/CICON49253.2020.9242553
- Meena, D., & Sharan, R. (2016). *An approach to face detection and recognition*. 10.1109/ICRAIE.2016.7939462
- Patil, N., Ambatkar, S., & Kakde, S. (2017). *IoT based smart surveillance security system using Raspberry Pi*. .10.1109/ICCSP.2017.8286374
- Penmatsa, R. K. V., & Ganta, S. (2020). A Novel Method for Indian Vehicle Registration Number Plate Detection and Recognition using Image Processing Techniques. *Procedia Computer Science*, 167, 2623–2633. doi:10.1016/j.procs.2020.03.324

- Punhani, A., Faujdar, N., & Kumar, S. (2019). Design and Evaluation of Cubic Torus Network-on-Chip Architecture. *International Journal of Innovative Technology and Exploring Engineering*, 8(6).
- Redmon, J., Divvala, S., Girshick, R., & Farhadi, A. (2016). *You Only Look Once: Unified, Real-Time Object Detection*. .10.1109/CVPR.2016.91
- Reghu, S., & Kumar, S. (2019). Development of Robust Infrastructure in Networking to Survive a Disaster. *2019 4th International Conference on Information Systems and Computer Networks, ISCON 2019*, 250-255.
- Sermanet, P., Eigen, D., Zhang, X., Mathieu, M., Fergus, R., & Lecun, Y. (2013). OverFeat: Integrated Recognition, Localization and Detection using Convolutional Networks. *International Conference on Learning Representations (ICLR)*.
- Sharma, A., Awasthi, Y., & Kumar, S. (2020). The Role of Blockchain, AI and IoT for Smart Road Traffic Management System/ *Proceedings - 2020 IEEE India Council International Subsections Conference, INDISCON 2020*, 289–296. doi:10.1109/INDISCON50162.2020.00065
- Singh, P., Bansal, A., Kamal, A. E., & Kumar, S. (2022). Road Surface Quality Monitoring Using Machine Learning Algorithm. In A. N. R. Reddy, D. Marla, M. N. Favorskaya, & S. C. Satapathy (Eds.), *Intelligent Manufacturing and Energy Sustainability. Smart Innovation, Systems and Technologies* (Vol. 265). Springer. doi:10.1007/978-981-16-6482-3_42
- Singh, P., Bansal, A., & Kumar, S. (2020). Performance analysis of various information platforms for recognizing the quality of Indian roads. *Proceedings of the Confluence 2020 - 10th International Conference on Cloud Computing, Data Science and Engineering*, 63–76. doi:10.1109/Confluence47617.2020.9057829
- Sudhakaran, S., Kumar, S., Ranjan, P., & Tripathy, M.R. (2020). Blockchain-Based Transparent and Secure Decentralized Algorithm. In *International Conference on Intelligent Computing and Smart Communication 2019. Algorithms for Intelligent Systems*. Springer. 10.1007/978-981-15-0633-8_32
- Viola, P., & Jones, M. (2001). Rapid Object Detection using a Boosted Cascade of Simple Features. *IEEE Conf Comput Vis Pattern Recognit*, 1. doi:10.1109/CVPR.2001.990517
- Zhou, X., Wang, D., & Krähenbühl, P. (2019). *Objects as Points*. Academic Press.